


Electric Strike

Specification and Features

- Field interchangeable - fail safe / fail secure
- Selectable DC12 / 24V
- Current drain
 - 250mA at 12V DC
 - 125mA at 24V DC
- Solenoids rated for continuous use
- Static holding force of 680kgs
- Stainless steel keeper and face plate
- Suits latches of 18mm with 3mm door gap
- Tested to 1 million cycles
- Non-monitored
- Fire rated to 4 hrs. - Australian Standard AS1905.1.2005
- Operating temperature -20°C to +60°C
- Weather resistant IP56
- Optional lip extensions
- Optional DIN style face plates to suit European sash locks

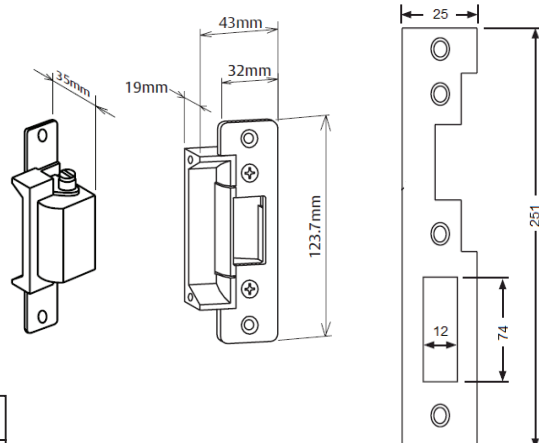

Product code	Description	Finish
ES100111-060M	Standard lipped strike	SSS
ES110111-150M	Lipless strike	SSS
ES-LP-X110-SSS	Face plate for European sash lock	SSS